

ESKIMO DISPLAY CASE

Superior Merchandising

-1°C / +5°C
30 F - 41 F



Climatic class 3M1
Humidity 60%
Ambient temp +25°C
Air speed 0,2m/sec



Display case for meat, deli, cheese and fish.



Contact Us
Phone: (347) - 809 3544 Email: contact@rimacold.com

ESKIMO DISPLAY CASE



Superior Merchandising

-1°C / +5°C
30 F - 41 F

Climatic class 3M1
Humidity 60%
Ambient temp +25°C
Air speed 0,2m/sec

RIMACOLD branded refrigerated display cases satisfy the needs of any butcher shop and delicatessen because they guarantee perfect storage of the products displayed thanks to new technologies that help maintain the organoleptic properties of fresh meat and its perfect display. We know that the refrigerated display cases are an important work tool and so are its design furnishings which are highly customizable in size and aesthetics.

Standard

- Anti fog heater
- Components compliant with R290 use
- Curved Glass
- Electronic control
- Fan assisted cooling
- Grey ABS bumper
- Hot gas evaporating system
- LED lighting
- Lifting up glass structure with pistons
- Plug-in cabinet, multiplexable linear modules
- Refrigerated under storage with doors
- Top shelf in aluminum or with glass
- Remote Refrigerated System

Accessories / Options

- Automatic defrost
- Electric defrost
- Movable and fix divider
- Multiplexable corners
- Sliding lids
- Stainless steel display plates
- Stainless steel internal body
- Stainless steel bumper
- Steps display plates
- Wooden Crate



RIMASEE



Contact Us

Phone: (347) - 809 3544 Email: contact@rimacold.com

ESKIMO DISPLAY CASE



Superior Merchandising

-1°C / +5°C
30 F - 41 F

Climatic class 3M1
Humidity 60%
Ambient temp +25°C
Air speed 0,2m/sec

Enhanced performance with new technology

- Reduces dehydration by 60%‡
- Increases humidity by 12%‡
- Reduces temperature variance‡

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H. We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.



Contact Us

Phone: (347) - 809 3544 Email: contact@rimacold.com

ESKIMO DISPLAY CASE




Superior Merchandising

-1°C / +5°C
30 F - 41 F

Climatic class 3M1
Humidity 60%
Ambient temp +25°C
Air speed 0,2m/sec

Range - Series	ESKIMO Curved Glass	Dimensions and Weight Expressed in Inches and lbs					
		O.A. Length No Sidewalls	O.A. Length with Sidewalls	O.A. Height	O.A. Depth	Net Weight with Sidewalls	Display Area ft2
Model	Eskimo VC 937	36 7/8"	40 1/16"	49 5/8"	42 3/8"	140	8.61
	Eskimo VC 1250	49 3/16"	52 3/8"	49 5/8"	42 3/8"	180	11.41
	Eskimo VC 1875	73 13/16"	76 15/16"	49 5/8"	42 3/8"	225	17.11
	Eskimo VC 2500	98 7/16"	101 9/16"	49 5/8"	42 3/8"	290	23
	Eskimo VC 3125	123 1/16"	126 3/16"	49 5/8"	42 3/8"	345	28.6
	Eskimo VC 3750	147 5/8"	150 13/16"	49 5/8"	42 3/8"	410	34.34

Range - Series	ESKIMO Curved Glass	Climatic Class 3 ta: +25°C / 60% U.R. (UNI EN ISO 23953-2)							
		Refrigerant R290		Watts				TEC (Total Energy Consumption) BTU/h	Volts / Hz
		Kg	BTU/h	Evap Fans	Anti Mist Heater	LED Lights	Nominal Power with Compressor		
Model	Eskimo VC 937	0.125	1350	12	34	15	338	864	115 / 60
	Eskimo VC 1250	0.135	1830	12	46	20	459	1174	115 / 60
	Eskimo VC 1875	0.15	1670	18	71	30	579	1482	115 / 60
	Eskimo VC 2500	0.15	2765	24	96	40	693	1773	115 / 60
	Eskimo VC 3125	2 x 0.145	3950	30	121	50	986	2524	115 / 60
	Eskimo VC 3750	2 x 0.150	4650	36	146	60	1162	2974	115 / 60

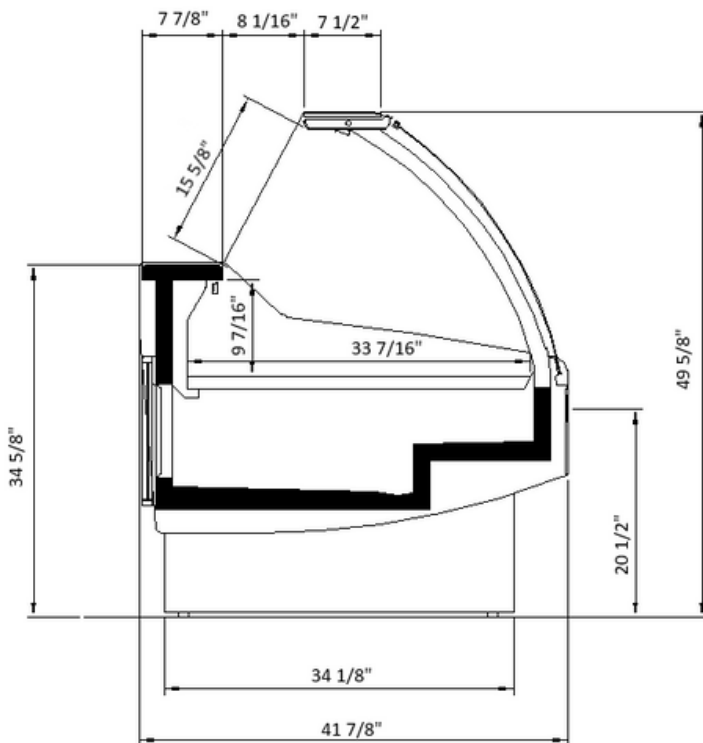

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75°F and 55% R.H. We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.



Contact Us
Phone: (347) - 809 3544 Email: contact@rimacold.com