

ASTORIA X

Reach In Freezer

-9.4°F ... -9.4°F



Climatic Class 3L1
Humidity 60%
Ambient temp 77°F
Air speed 0,2m/sec



Vertical High High Volume Remote Reach In Freezer



Contact Us

Phone: (347) - 809 3544 Email: sales@rimasee.com

ASTORIA X

Reach In Freezer

-9.4°F ... -9.4°F



Climatic class 3L1
Humidity 60%
Ambient temp 77°F
Air speed 0,2m/sec

ASTORIA X Low Temperature Reach-In

The ASTORIA X is an extra tall reach-in cases designed for maximum energy savings, refrigeration performance and merchandising impact.

Its sleek design and innovative features make the ASTORIA X a top choice for businesses looking to showcase their products in a stylish and energy-efficient manner. With its extra tall reach-in design, this case offers ample space for displaying a wide variety of items while ensuring optimal refrigeration performance. The ASTORIA X is not only practical but also visually appealing, making it a standout piece that enhances the overall merchandising impact of any store. Whether you're looking to attract customers with eye-catching displays or simply streamline your refrigeration system, the ASTORIA X is a smart investment for any business seeking to elevate its presentation and efficiency.

Standard features

- 4 or 5 shelves with price holder depending on the height
- Digital Thermometer
- Fan assisted cooling
- Grey ABS bumper
- Mechanic expansion valve
- Remote cabinet, with multiplexable linear modules
- Ultra-panoramic hinged and double glazed doors

Accessories

- CO2 refrigeration system
- Control board master and slave
- Electronic control
- Electronic valve
- Grid dividers
- LED lighting
- Stainless steel bumper
- Ultrabright doors with antifog foil

Vertical High High Volume Remote Reach In Freezer



Contact Us

Phone: (347) - 809 3544 Email: sales@rimasee.com


ASTORIA X

Reach In Freezer

-9.4°F ... -9.4°F



Climatic class 3L1
Humidity 60%
Ambient temp 77°F
Air speed 0,2m/sec

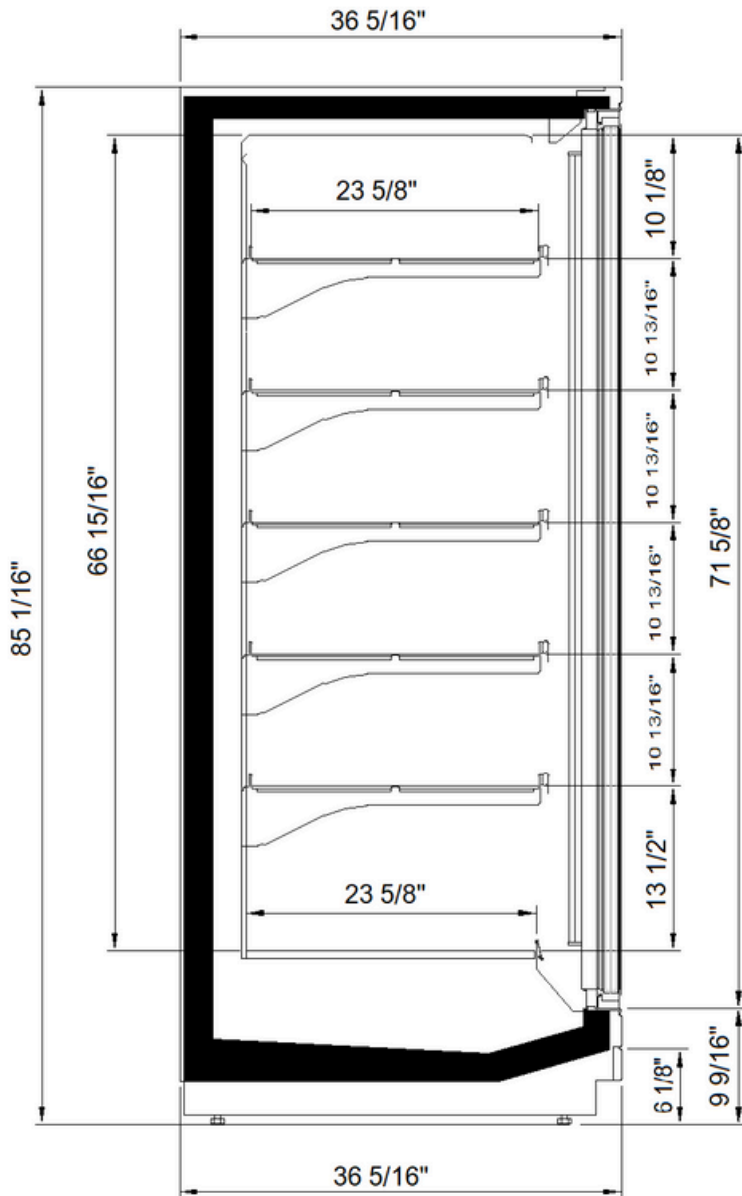

The Astoria is an extra tall reach-in cases designed for maximum energy savings, refrigeration performance and merchandising impact.

Benefits

- Suitable for heavy shopping environments
- Superior energy efficiency the refrigerated space
- Excellent product temperature consistency throughout

Model	ENERGY		
	BTU/h	Amps/hour (Ah)	Evap. Temp.° F
Astoria X 1D	1706	3.64	-22
Astoria X 2D	3412	7.06	-22
Astoria X 3D	5118	10.45	-22
Astoria X 4D	6824	13.84	-22
Astoria X 5D	8530	17.24	-22

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the compressor the amp load. Remote cases must be hard wired – no plugs.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

Vertical High High Volume Remote Reach In Freezer



Contact Us

Phone: (347) - 809 3544 Email: sales@rimasee.com

ASTORIA X

Reach In Freezer

-9.4°F ... -9.4°F



Climatic class 3M2
Humidity 60%
Ambient temp 77°F
Air speed 0,2m/sec

Model	Dimensions					
	Lenghts (With side walls)	Lenghts (No side walls)	Height	Depth	Display Area (f ²)	Refrigerated Volume (ft ³)
Astoria X 1D	35 5/8"	30 7/8"	85 1/16"	36 5/16"	30.5	22.7
Astoria X 2D	66 5/16"	61 9/16"	85 1/16"	36 5/16"	60.6	45.1
Astoria X 3D	96 7/8"	92 3/16"	85 1/16"	36 5/16"	90.7	67.6
Astoria X 4D	127 9/16"	122 13/16"	85 1/16"	36 5/16"	120.9	90.1
Astoria X 5D	158 1/4"	153 1/2"	85 1/16"	36 5/16"	151.1	112.6



Vertical High High Volume Remote Reach In Freezer



Contact Us

Phone: (347) - 809 3544 Email: sales@rimasee.com

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.