

Alaska 2

Plug In Gelato Case

(-4... -7 °F)



Climatic class 4L1
Humidity 55%
Ambient temp 77°F
Air speed 0,2m/sec



Curved Glass Plug In Gelato Display Case



Contact Us

Phone: (347) - 809 3544 Email: ronald@rimasee.com

Alaska 2

Plug In Gelato Case

(-4... -7 °F)



Climatic class 4L1
Humidity 55%
Ambient temp 77°F
Air speed 0,2m/sec

Features & Benefits

- Tempered side glass
- CFC free injected foam insulation
- Silver colored PVC coated steel front panel
- PVC coated steel gray interior Black steel kick plate
- All trim and glass supports-aluminum
- Stainless steel pans Lift up tempered front glass
- Thermopane end glass Stainless steel work bench
- Removable rear plexiglass sliding doors
- Temperature and defrost regulated by a digital controller
- Levelling feet



Optional Extras

- Stainless steel interior exterior
- Other colors available

Even temperature distribution, thanks to the mild and double duct airflow.

PAN CONFIGURATIONS

(10) Pans 14-1/8" long x 6-1/2" wide x 6" deep ALASKA 2_VD47F_100 S

(16) Pans 14-1/8" long x 6-1/2" wide x 6" deep ALASKA 2_VD47F_150 S

(22) Pans 14-1/8" long x 6-1/2" wide x 6" deep ALASKA 2_VD47F_200 S

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

Plug In Gelato Display Case

- LOW TEMPERATURE
- FORCED AIR REFRIGERATION
- LIFT UP TEMPERED FRONT GLASS
- 12, 16, AND 22 PAN CONFIGURATIONS
- CASES CAN BE MULTIPLEXED



Contact Us

Phone: (347) - 809 3544 Email: ronald@rimasee.com


Alaska 2

Plug In Gelato Case

(-4...-7°F)



Climatic class 4L1
Humidity 55%
Ambient temp 77°F
Air speed 0,2m/sec

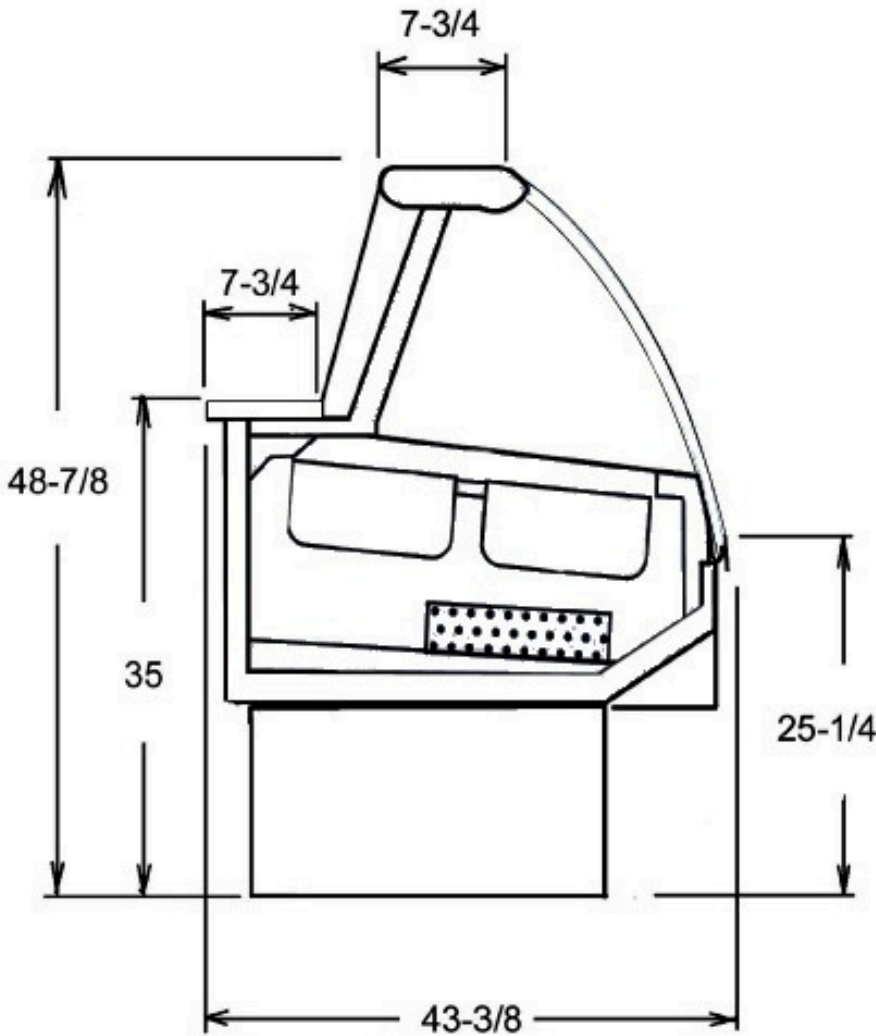

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

NOTE: These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R290 refrigerant. Ventilation grills at front and back cannot be blocked.



Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Castors

Plug In Gelato Display Case

Self Contained	Model	O.A. Length (inches)	Electrical 115V				Defrost Amp	Weight lbs
			Compressor		Lights Fans HTRS	Total Amps		
			Case Temp	F.L.A				
	ALASKA 2_VD47F_100 S	40.4	-4 / -7 °F	10.00	0.26	10.30	22.90	661
	ALASKA 2_VD47F_150 S	58.2	-4 / -7 °F	(2) 10.00	0.49	20.50	26.40	860
	ALASKA 2_VD47F_200 S	77.5	-4 / -7 °F	(2) 10.00	0.53	20.50	26.40	992



Contact Us

Phone: (347) - 809 3544 Email: ronald@rimasee.com