FLORIDA OV BT



Reach-In Merchandiser for Frozen Food

-13-....16.6°F

Climatic class 3L1 Humidity 60% Ambient temp 77°F Air speed 0,2m/sec



High Capacity Plug In Reach In Freezer








FLORIDA OV BT



Reach-In Merchandiser for Frozen Food

-13-....16.6°F

Climatic class 3L1 Humidity 60% Ambient temp 77°F Air speed 0,2m/sec

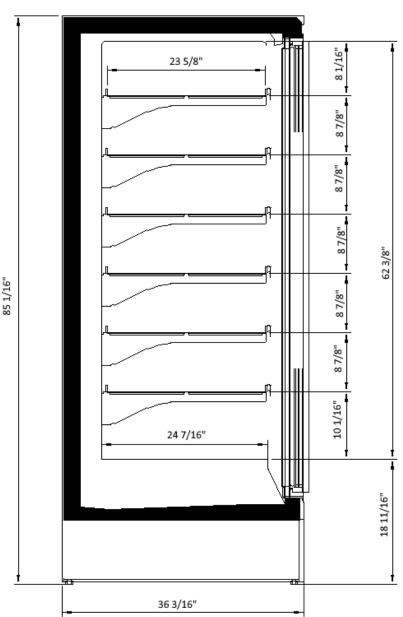

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

STANDARD EQUIPMENT

- Electronic Control: Compliant with flammable gas use
- Built-in Unit: R290
- · Lighting: Vertical LED lighting for doors
- Bumper: ABS bumper for added protection
- Shelving: 5/6 grid shelves
- Fans: Low consumption fans, including on the condenser
- Price Holders: Transparent price holders (height: 1.57 inches) for shelves and body; color options available with a white, black, or grey strip
- · Defrost: Electric defrost system
- Multiplexing: Compatible with FLORIDA OV cases
- Sidewall Thickness: 3.94 inches for FLORIDA OV cases
- Electrical Compliance: Components compliant with EN60335-2-89 ANNEX BB
- Standard Colors: Available in RAL colors 1015, 1021, 2011, 3002, 3020, 5005, 5012, 6018, 7035, 7037, 9006, and 9010 for low and top profiles

NOTE These cases are engineered to operate in locations not exceeding 77°F and 60% R.H. These cases are designed to operate using R290 refrigerant. Ventilation grills at front and back cannot be blocked.









FLORIDA OV BT



Reach-In Merchandiser for Frozen Food

-13-....16.6°F

Climatic class 3L1 Humidity 60% Ambient temp 77°F Air speed 0,2m/sec

FLORIDA OV BT - R290 - DOOR PITCH 30 11/16"

Features:

- Plug-in Cabinets: Multiplexable linear modules
- Digital Thermometer: Ensures accurate temperature monitoring
- LED Lighting: Single top LED lighting available in white or pink
- Interior: White internal body for a clean look
- Bumper: Grey plastic bumper for added protection
- Shelving: Inclinable shelves with transparent price holders (height: 1.57 inches)
- Thermostatic Valve: Compatible with the most common gases

Technical Specifications:

- Refrigerant: R290 (Propane)
- Ozone Depletion Potential: 0
- Global Warming Potential: 3.3
- Boiling Point: -44.05 to -43.67 °F
- Critical Temperature: 206.06 °F
- Critical Pressure: 4,248 kPa
- Auto Ignition Temperature: 878 °F
- Flash Point: -155.2 °F
- Density: 2.0098 kg/m³ (at 32 °F, 101.3 kPa)
- Vapor Pressure: 853.16 kPa (at 69.98 °F)
- Safety: Highly flammable (Class 3)
- Lubricant Required: MO, AB, POE

NOTE These cases are engineered to operate in locations not exceeding 77°F and 60% R.H. These cases are designed to operate using R290 refrigerant. Ventilation grills at front and back cannot be blocked.

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.





High Capacity Plug In Reach In Freezer





