

RIMA P102VE

Multipurpose Serve Over

35°F - 41°F

33°F - 40°F



Climatic class 3M1/3M2

Humidity 55%

Ambient temp 75°F



Plug In Curved Glass Multipurpose Serve Over Counter



RIMASEE



Intertek

Contact Us

Phone: (347) - 809 3544 Email: ronald@rimasee.com

RIMA P102VE



Multipurpose Serve Over

35°F - 41°F

33°F - 40°F

Climatic class 3M1/3M2

Humidity 55%

Ambient temp 75°F

STANDARD

- 3 levels of removable, adjustable and tiltable shelves
- Display area in skinplate
- Exterior decoration in lacquered MDF (RAL)
- Sliding rear doors
- Multiplexible
- Ventilated refrigeration
- Top LED lighting
- Shelves LED lighting
- Digital thermometer
- Front glass anti-condensation system
- Electronic temperature controller
- Programmable automatic defrosting
- Electric evaporation of defrost water
- Tilting front glass
- Tempered glasses
- Double-glass sides
- Adjustable feet
- Voltage 115 V - 60 Hz - 1Ph



OPTIONS

- Display area in painted plate (RAL)
- Display area in AISI 304 stainless steel
- Treated evaporator
- Additional socket
- Joining kit
- Castors with brakes
- Adjustable stainless steel high feet



Refrigerant (ref/GWP) R290/3

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters



Ventilated



35,6/41 °F



Automatic



LED



120V | 1 Ph | 60 Hz



Type 1 | 75 °F | 55% R.H.



Plug-in



R290 ECO Friendly

Plug In Curved Glass Multipurpose Serve Over Counter



Contact Us

Phone: (347) - 809 3544 Email: ronald@rimasee.com

RIMA P102VE



Multipurpose Serve Over



35°F - 41°F

33°F - 40°F

Climatic class 3M1/3M2

Humidity 55%

Ambient temp 75°F

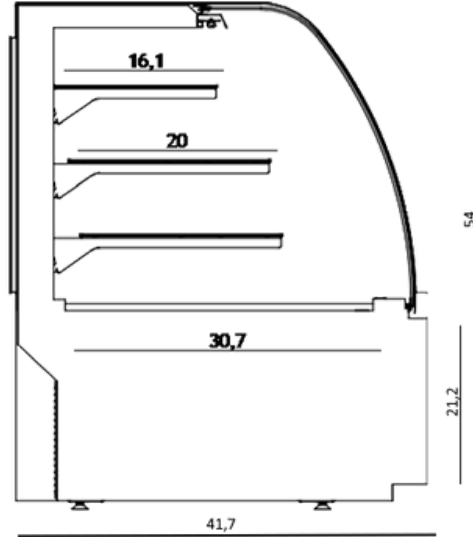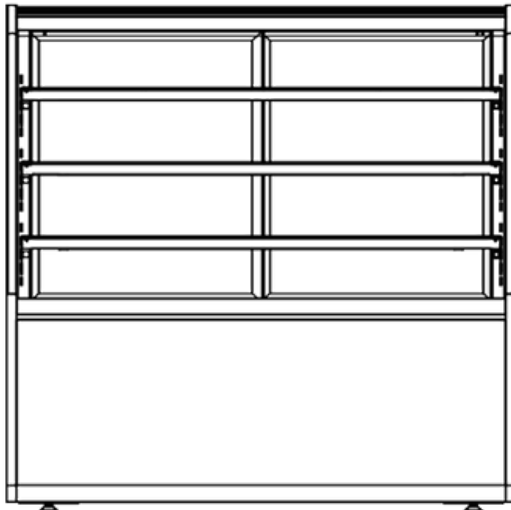

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

Standard Mounting



Levelling Feet

Optional Mounting



Adjustable Legs



Casters

Self-Contained	Model	O.A. Length (inches)	Volume FT ³	Electrical 115V					NEMA 115 V Plug	Refrigerated Shelf Area ft ²	Crate Size Inches			
				Front	Compressor		Lights Fans HTRS	EVAP PAN			Total Amps	L"	W"	H"
					H.P	F.L.A								
	P102_VE_100 S	40.4	9.843	3/8	8.40	0.95	3.30	11.50	5 - 15P	22.06	48	46	58	
	P102_VE_130 S	52.2	13.02	1/2	9.60	0.96	3.30	11.55	5 - 15P	29.18	59	46	58	
	P102_VE_150 S	60	15.137	1/2	9.60	1.08	3.30	12.18	5 - 15P	33.93	67	46	58	
	P102_VE_200 S	77.5	19.687	5/8	8.90	1.68	3.30	13.88	5 - 15P	44.12	85	46	58	

NOTE These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R290 refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired - no plugs.

Plug In Curved Glass Multipurpose Serve Over Counter



RIMASEE

Contact Us

Phone: (347) - 809 3544 Email: ronald@rimasee.com

