

# RIMA W080SS\_25

## Open Air Merchandiser

36 - 40°F



Climatic Class 3M2  
Humidity 55%  
Ambient temp 75°F  
Air speed 0,2m/sec



Self Contained Open Air Merchandiser



Contact Us

Phone: (347) - 809 3544 Email: sales@rimasee.com



# RIMA W080SS\_25

## Open Air Merchandiser

36 - 40°F




Climatic Class 3M2  
Humidity 55%  
Ambient temp 75°F  
Air speed 0,2m/sec

### STANDARD FEATURES

- Tempered side glass
- Pull down night curtain
- CFC free injected foam insulation
- Silver colored PVC coated steel front panel
- PVC coated steel gray interior
- Black steel kick plate
- Foamed polystyrene black end panels
- Height adjustable shelves can be tilted
- Products stop on all shelves
- Temperature and defrost regulated by a digital controller
- Removable condensate evaporating pan for easy cleaning on self contained units
- Slide out condensing unit on self-contained units
- Digital thermometer
- Leveling feet

### OPTIONAL FEATURES

- Stainless steel interior and / or exterior
- Other colors available
- Solid or full view end panels
- Additional shelves
- Joining Kit and/or Partition and / or product dividers
- Price tag molding
- Condensate evaporating pan for remote cases
- Casters add 4-3/8" to height
- Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

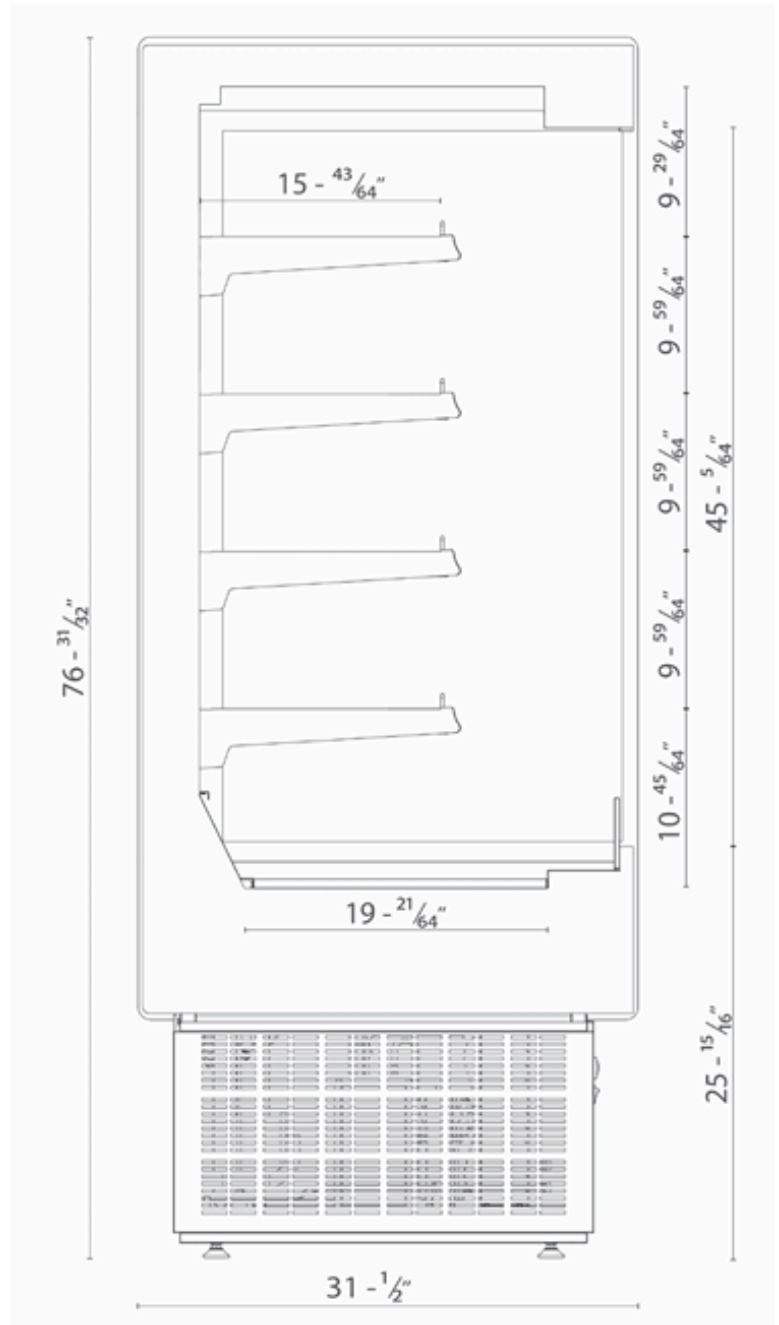

Self Contained Open Air Merchandiser

NOTE: We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.



Intertek



RIMASEE

Contact Us

Phone: (347) - 809 3544 Email: sales@rimasee.com

# RIMA W080SS\_25

## Open Air Merchandiser

36 - 40°F



Climatic Class 3M2  
Humidity 55%  
Ambient temp 75°F  
Air speed 0,2m/sec

Self Contained	Model	O.A. Length (inches)	Capacity Cu.ft	Electrical				Nema Plug	Weights lbs		Crate Size Inches		
				Compressor		Total Amps 115v	Total Amps 220V		No Crate	With Crate	L"	W"	H"
				H.P	F.L.A 115V								
	W080_SS_25_070	29.2	15.9	3/4.	16.00	20.7	N/A	1x 115V	408	542	32.2	32.5	85.4
	W080_SS_25_100	41	23.3	1	16.2	26.3	N/A	1x 115V	463	633	44	32.5	85.4
	W080_SS_25_130	50.2	29.1	1	16.2	27	N/A	1x 115V	514	728	53.2	32.5	85.4
	W080_SS_25_150	60.6	35.6	1 - 1/4.	N/A	10.8	9.2	1x 115V + 1x 220V	580	818	63.6	32.5	85.4
	W080_SS_25_200	78.2	46.6	2 x 1	N/A	11.2	16.4	1x 115V + 1x 220V	752	1049	81.2	32.5	85.4
	W080_SS_25_250	96.6	58.2	2 x 1	2 x 16.2	2 x 27	N/A	1x 115V + 1x 220V	939	1285	99.6	32.5	85.4



**NOTE** These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R290 refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired - no plugs.



Self Contained Open Air Merchandiser



Contact Us

Phone: (347) - 809 3544 Email: sales@rimasee.com